


ROTO 4676 FB



- Heat generator with front access
- Integrated electric board with front access
- Door with double glass and double lock
- Outside panels in st/st
- Oven shipped in 2 preassembled elements or completely assembled (as option)
- Automatic steam exhaust system (Fast Air)
- Automatic start
- Hood with exhaust fan and grill
- Double glass door end double closing
- Standard rotation device with hook (for racks up to 100 kg full load)
- Heat generator with armored electric elements (SE)
- Steam generator with cascade elements with spheres + liter-counter
- Preset for automatic lifting group by lever (optional)
- Racks height 1815 mm

| | |
|---------------|-----------------|
| Power inlet | 400/3N~/50 |
| Fume exhaust | Diameter 200 mm |
| Steam exhaust | Diameter 250 mm |

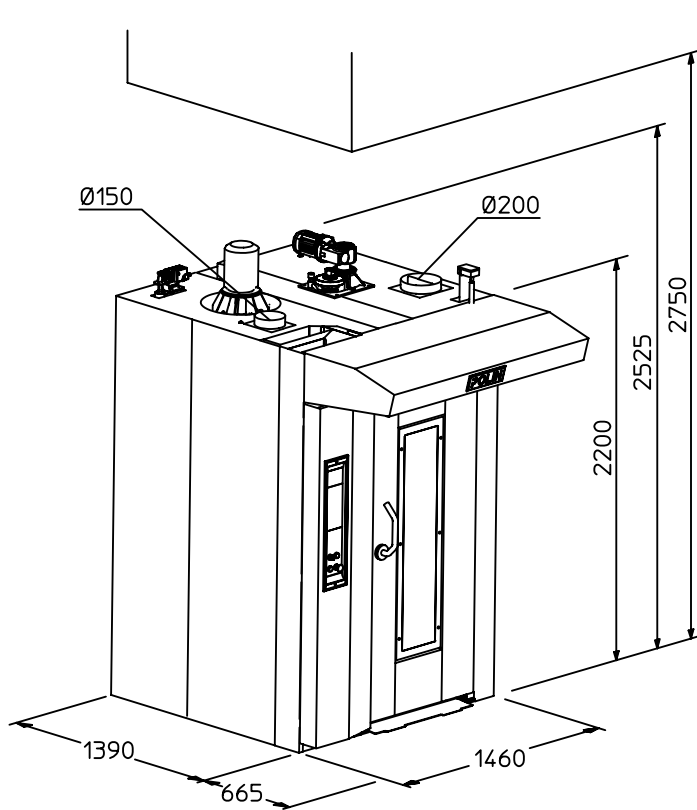

| | Pan capacity | Pan size | Minimum door width | Weight | Voltage | SC version | | SE version | |
|---------------------|--------------|----------|--------------------|--------|---------|------------|--------|------------|-------------|
| | | | | | | kW | kcal/h | Standard | Potentiated |
| | n° | passo | mm | mm | kg | kW | kcal/h | kW | kW |
| ROTO 4676 FB | 15 | 105 | 460x760 | 770 | 1500 | 1,0 | 45.000 | 39 | 49 |
| | 18 | 87 | | | | | | | |